

Model Specific Information

Thank you for purchasing an ALWAYS Bikes electric bicycle. We are proud to provide a quality product that will provide an un-paralleled ownership and riding experiences for years.

Please note the following information will highlight specification, anatomy of your bike, and geometry.

If you have questions after reading this manual, please refer to ALWAYS Bikes Online Support.

eBliss Global, Inc. dba ALWAYS BIKES

<https://www.ALWAYSBikes.com/support>

eMail questions to support@alwaysbikes.com

Call Toll Free at 888-341-6450



ANYTIME

SPEC




Class III	75+ Miles	48V 14Ah UL2271 Compliant
<i>Classification</i>	<i>Range TRIP/PAS/PEDAL</i>	<i>Battery</i>
500W 140Nm Bafang Mid Drive UL2849 Compliant	672 Wh	28mph TRIP/PAS 20mph Throttle
<i>Motor Size</i>	<i>Wh- Watt Hours</i>	<i>Top Speed</i>
Enviolo Manual Stepless Gear Rear Hub	Triple Sensor Technology Torque, Cadence, Speed	59 lbs.
<i>Gearing</i>	<i>Sensor</i>	<i>Bike Weight</i>
Gates Belt Driven	300 lbs	Charcoal Metallic or Metallic Green
<i>Drive</i>	<i>Max Pay Load Capacity</i>	<i>Color Options</i>

<i>Rider Fit</i>	5' to 6'2" Step Thru
<i>Frame Material</i>	6061 Aluminum
<i>Brakes</i>	Hydraulic Disc Brakes w/180mm Rotor
<i>Tire Size</i>	29" x 2.0" pressure 15-40 PSI (ideal 30 PSI)
<i>Charging Time</i>	4-5 hours
<i>Charger Input/Output</i>	100-240V 50/60Hz AC - 54.6V 3A DC-CE certified, UL
<i>IP level</i>	IPX4
<i>Accessories Included</i>	Bell, Kickstand, Fenders, Rear Rack, Integrated Front &, Rear Lights

ANYTIME ANATOMY



ANYTHING GEOMETRY

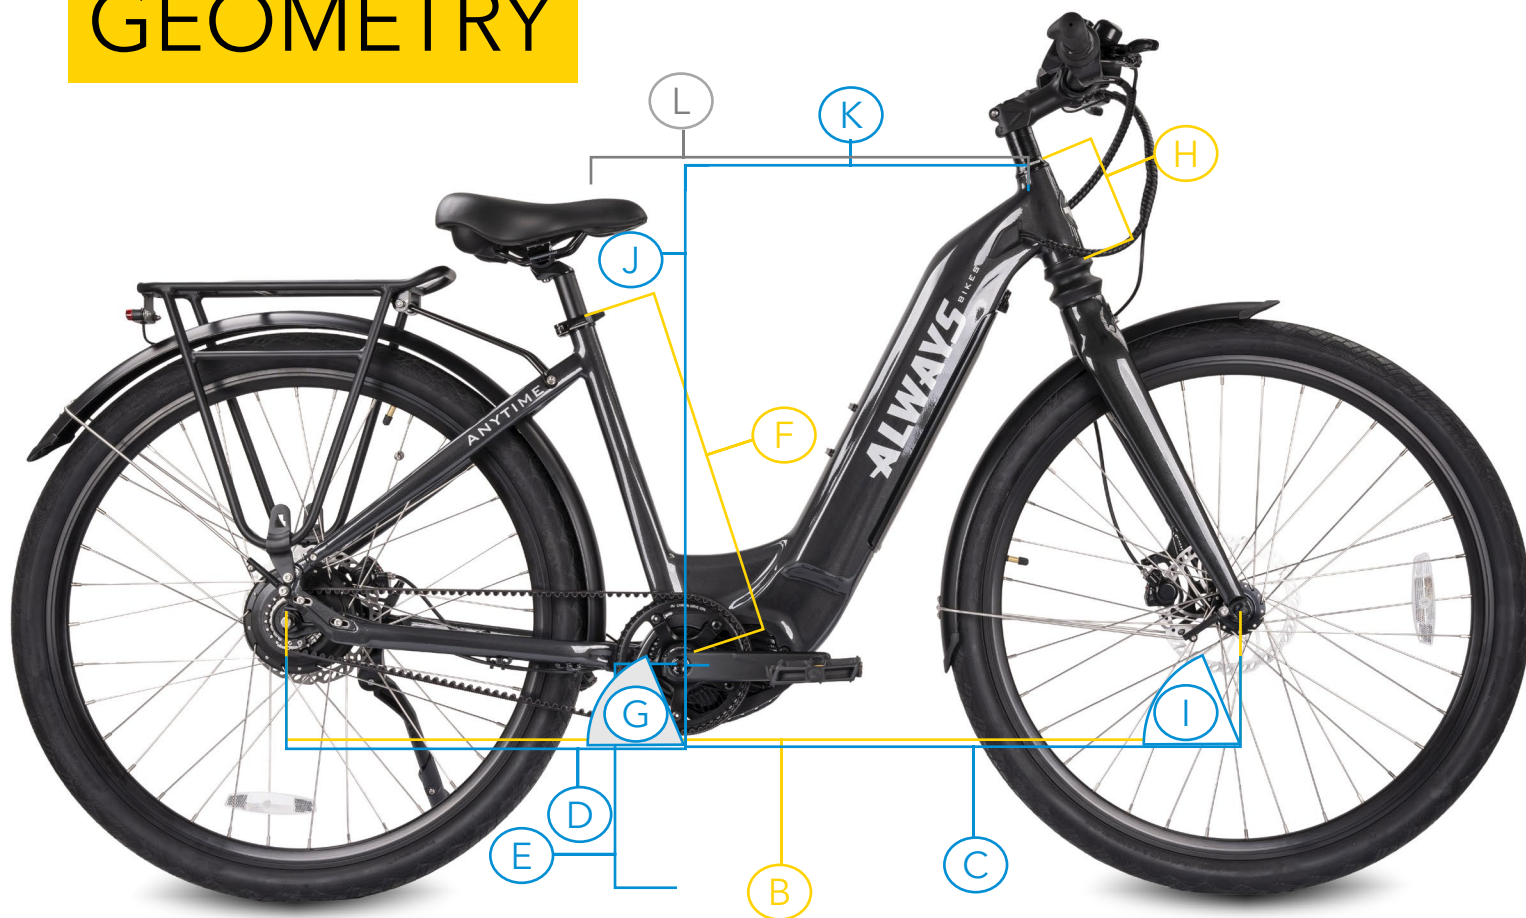

			ANYTIME
B	Wheel- Base	mm	1164
C	Front Center	mm	683
D	Chain Stay	mm	487
E	Bottom Bracket (BB) Height	mm	280
F	Seat Tube Length	mm	450
G	Seat Tube Angle	deg	73
H	Head Tube Length	mm	117
I	Head Tube Angle	deg	71
J	Frame Stack	mm	614
K	Frame Reach	mm	442
L	Effective Top Tube Length	mm	630